


MRM 40/32

Reduction adaptor, brass nickel-plated, M40/M32



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

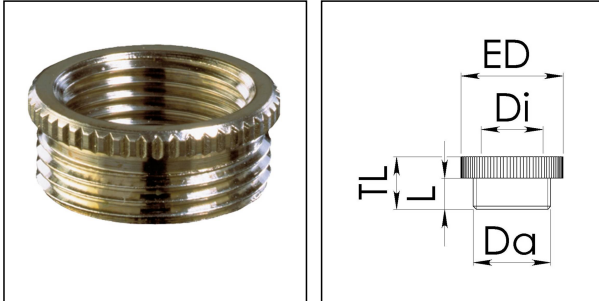

Material	Brass nickel-plated
Temp. range min	-200 °C
Temp. range max	250 °C
Thread type outer	M
Ø outer thread	40
Lead outer	1,5
Length screw-in thread L	8 mm
Thread type inner	M
Ø inner thread	32
Lead inner	1,5
External diameter ED	45 mm
Total length TL	11,5 mm
Surface	Nickel-plated
Order no. nickel-plated	10063948
Type	MRM 40/32
Packing unit	25
ETIM-Classification	EC000938

Recommended accessories

EMMU 40	10063146
ORD-E 40	10064702

15.06.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

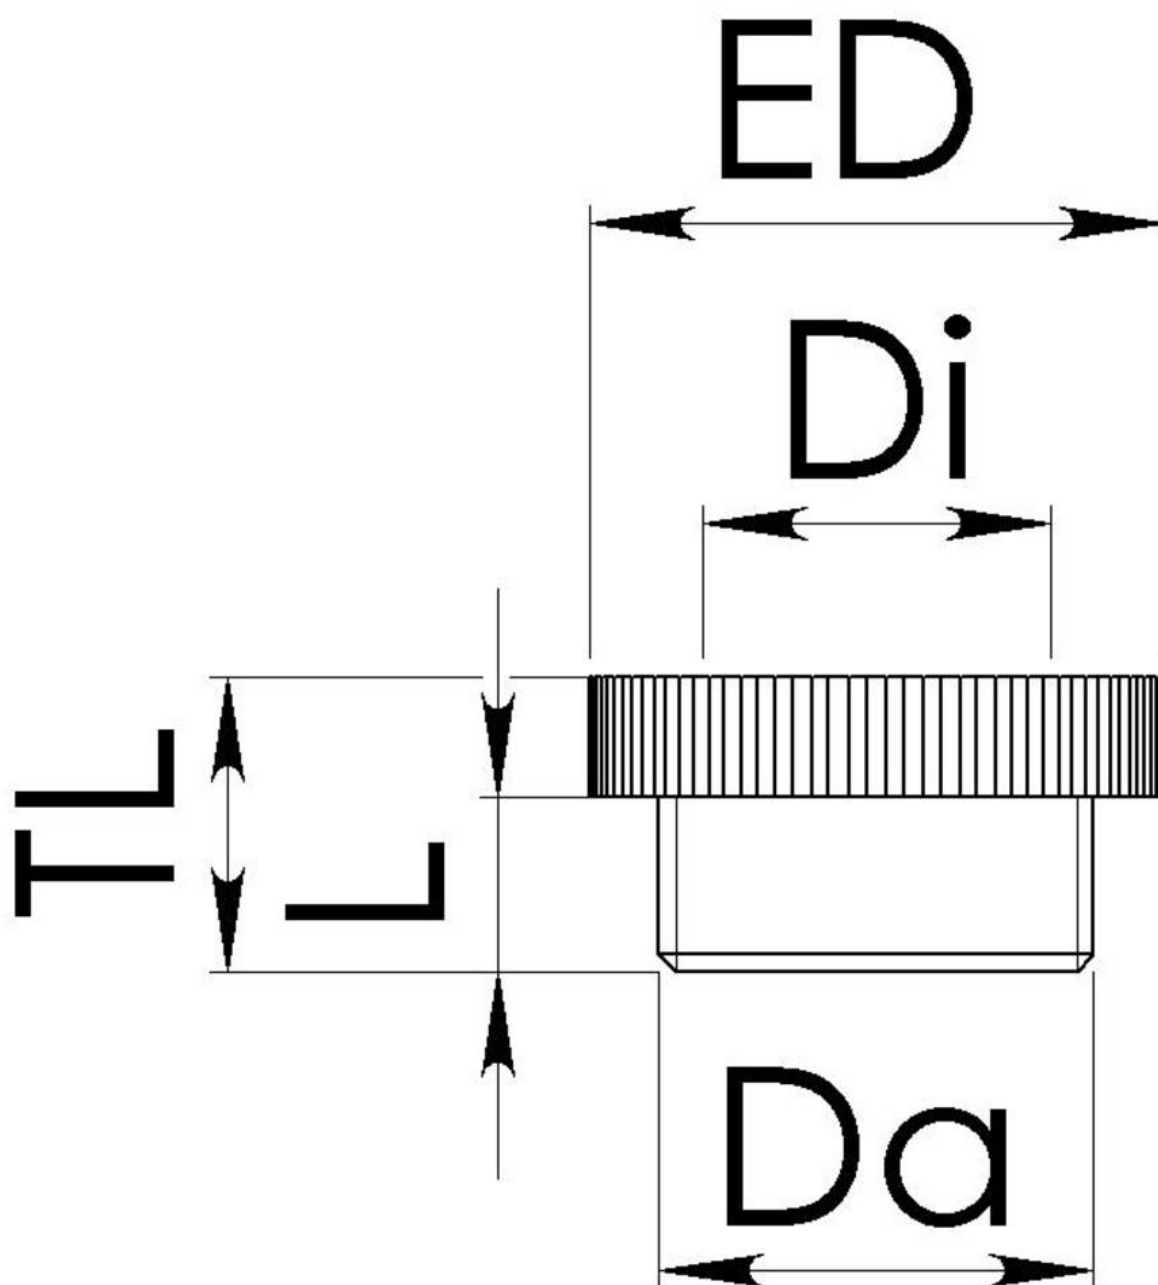

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice