

## OSSP-R 75 / M75

Ex d stop end round, brass nickel-plated, M75



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



|                          |                     |
|--------------------------|---------------------|
| Material                 | Brass nickel-plated |
| Material sealing gasket  | CR                  |
| Temp. range min          | -60 °C              |
| Temp. range max          | 120 °C              |
| Protection class         | IP66 / IP67         |
| Type of protection       | Ex eb, Ex db, Ex tb |
| Ex-Certificate           | ATEX, IECEx         |
| Thread type              | M                   |
| Ø Connection thread D    | 75                  |
| Lead                     | 1,5                 |
| Length screw-in thread L | 15 mm               |
| Key width SW             | 10 mm               |
| External diameter ED     | 88 mm               |
| Total length TL          | 21 mm               |
| Surface                  | Nickel-plated       |
| Order no. nickel-plated  | 50065617            |
| Type                     | OSSP-R 75 / M75     |
| Packing unit             | 1                   |
| ETIM-Classification      | EC000032            |

03.08.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

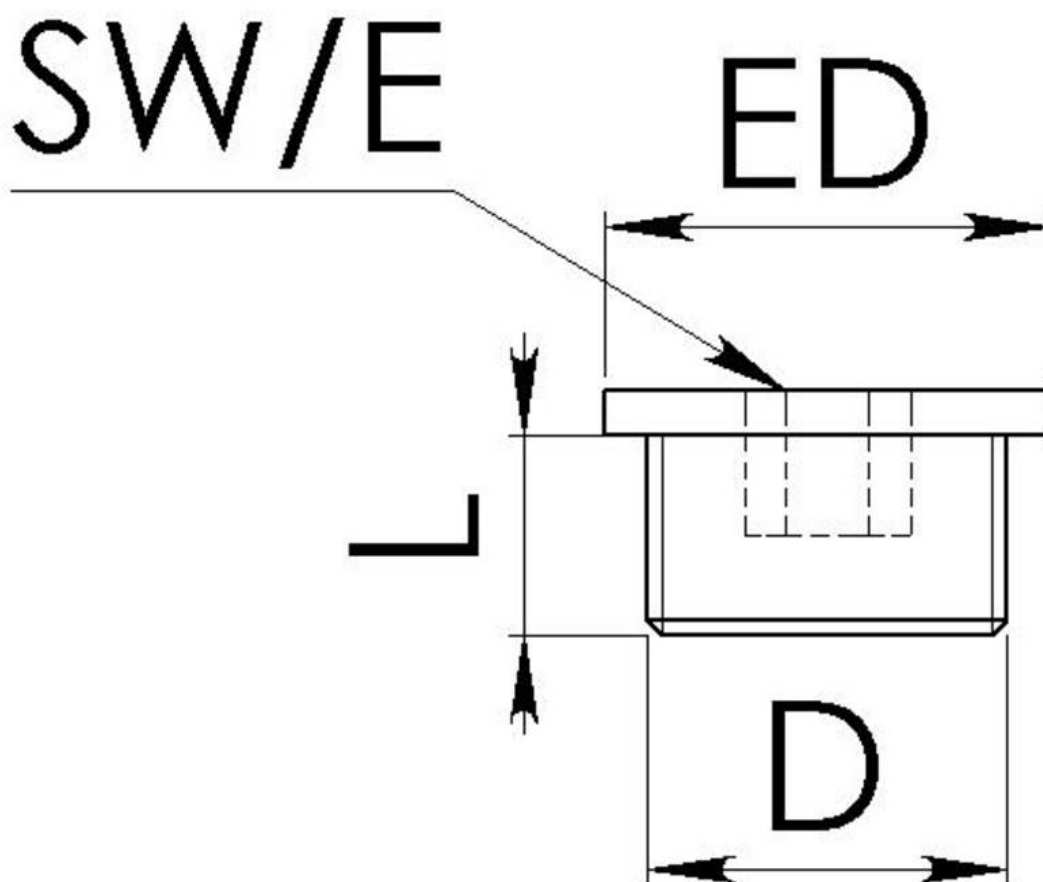

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice