

Mounting

Plano Low LED – Interior fitting with very low building height

Description

Interior fitting to be recessed in T-profile ceiling. Frame in aluminium powder painted in white RAL 9010. Plano Low LED is delivered "plug&play", complete with 1.5m 2-pol cable and plug from driver. DALI version supplied with 1.5m 4pol cable from driver, DALI entries with DA, DA marking. The driver and the LED panel are connected with 1m cable.

Application areas

School, office, meeting facilities, corridors, shops etc...

Diffuser

Opal akrylic disc.

Monting



To be placed directly into the T-profile system or recessed in a surface mounted frame.

Lightsource

Total effect: 38W (700mA)
 Luminous flux fitting: 3130lm
 Luminous efficiency fitting: 82,4lm/W
 Colour temperatur: 3000K
 Colour index Ra: >84
 Colour tolerance MacAdam: 3
 Life time L70: 50 000 hours



Plate for 600x600 module with light opening Ø500mm.

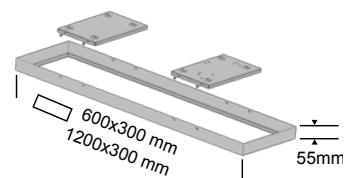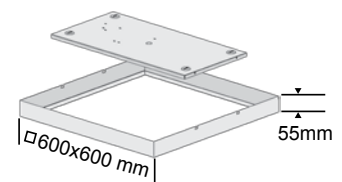

Frames for surface mounting

INTERIOR

| Number | Type | Module | Light source | |
|--------------|--------------------|------------|----------------------|-------------------|
| 117860 | Plano Low LED 6X6 | 600x600mm | LED 38W 830 | driver incl. |
| 117862 | Plano Low LED 6X6 | 600x600mm | LED 38W 830 | DALI driver incl. |
| 118428 | Plano Low LED 6x3 | 600x300mm | LED 830 25W | driver incl. |
| 118429 | Plano Low LED 6x3 | 600x300mm | LED 830 25W | DALI driver incl. |
| 118210 | Plano Low LED 12x3 | 1200x300mm | LED 38W 830 | driver incl. |
| 118211 | Plano Low LED 12x3 | 1200x300mm | LED 38W 830 | DALI driver incl. |
| Accessories: | | | | |
| 117623 | Frame | 600x600mm | Surface mounted | |
| 118650 | Frame | 600x300mm | Surface mounted | |
| 118023 | Frame | 1200x300mm | Surface mounted | |
| 118254 | Decor plate | 600x600mm | Light opening Ø500mm | |

Reservation for misprinting or product changes.