

TERMINAL BOX 2.5mm² 400V IP67

The boxes have 4 x 2.5 mm² mantle terminals and a 2.5 mm² earthing contact. Aluminum PG 16 cable gland seals in normal product. The range covers most installation situations.

RAW MATERIAL

Recycled aluminum

SIZE

See picture below

NET WEIGHT

0,3 kg/pce – 0,4 kg/pce

PACKAGE

20 pcs/Box

COLOR

Unpainted, Grey, Brown and other.

COUNTRY OF ORIGIN

Finland / Suomi

CERTIFICATION

CE, EN60670-1:2005, EN 60670-22:2007

VOLTAGE

Max 400 V.

ENCLOSURE CLASS

IP 67

CONNECTORS

Screw terminals, 4x2.5 mm² + 2.5 mm²

PENETRATIONS

We equip the terminal boxes with aluminum PG 16 cable gland seals.


SPECIAL

The box is equipped with an internal detensioner.
By special order, protection class IP 68.

Models:

16 237 52

16 235 52 Grey, RAL-7035

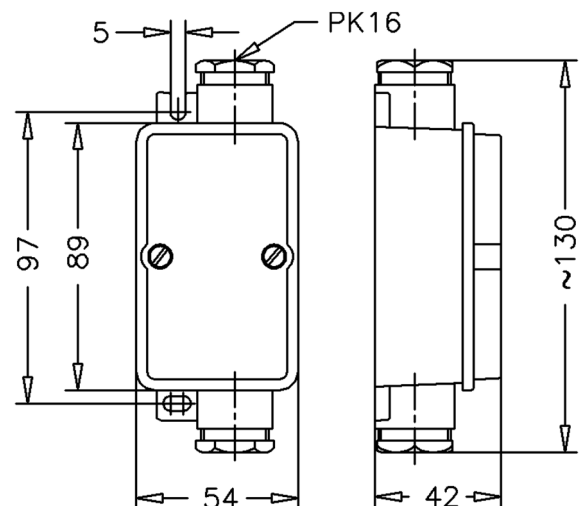

The RAL-7035 color series products meet the highest UV protection and corrosion requirements. All 7035 products are with acid-resistant cover screws and oil-resistant gaskets.

3D CAD files available, e.g. STEP, IGS

Selcast Oy

Kilantie 19

10300 KARJAA

FINLAND

+358 19 278 5800

www.selcast.fi selcast@selcast.fi