

CA 1860 & CA 1862 INFRARED THERMOMETERS



The simplicity of remote temperature measurements!

Compact and rugged due to its 3-metre fall resistance and IP65 ingress protection


Excellent metrological performance

Wide dynamic range for measurement:

-35 °C to +650 °C

Dual LASER sight (CA 1862) for precise targeting of the test area

Configurable high and low alarms



Measure up



TECHNICAL SPECIFICATIONS



Infrared technology for greater accuracy

To locate all the areas of overheating in just a few seconds, these ergonomic thermometers have been specially designed to be particularly simple to use.

The pistol-shaped casing also make them exceptionally comfortable to handle.

All the functions are accessible with just one hand. Thanks to the laser sight and its flexible use, users can point at the centre of any target without any possibility of error.

The results are then displayed on the backlit LCD screen.

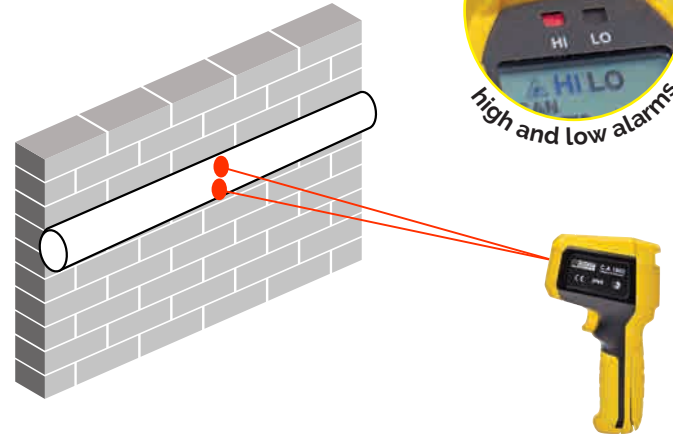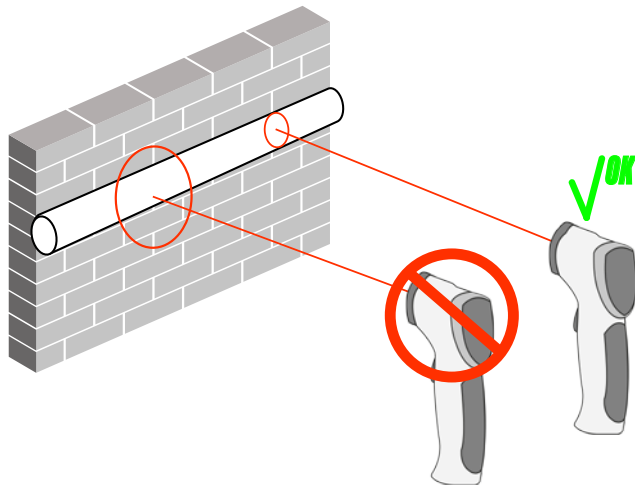

SPECIFICATIONS

CA 1860

CA 1862

Measurement range	- 35 °C to + 450 °C (- 31 °F ~ + 842 °F)	- 35 °C to + 650 °C (- 31 °F to + 1202 °F)
Measurement accuracy	$\geq 0^{\circ}\text{C} : \pm 1.8^{\circ}\text{C}$ or $\pm 1.8\%$ of reading (take the higher value) $< 0^{\circ}\text{C} : \pm (1.8^{\circ}\text{C} + 0.1^{\circ}\text{C} / ^{\circ}\text{C})$	
Display resolution	0.1 °C (0.1 °F)	
Distance/spot ratio	10 : 1	12 : 1
Emissivity	0.95	adjustable from 0.1 to 1.0
Response time	250 ms (95 % of reading)	
Spectral response	8 μm ~ 14 μm	
Number of lasers	Single laser	Dual laser
Measurement functions	Instantaneous mode, MAX, MIN, AVG, differential (DIF), continuous measurement by locking the measurement trigger, alarms	
Type of battery	9V battery (6F22)	
Protection	IP65	
Resistance	Fall from 3 metres	
Tripod insert	Yes	
Weight/dimensions	292 g / 189 mm x 118 mm x 55 mm	

Standard state at delivery

CA 1860 and CA 1862 :

delivered with battery, user's manual, verification certificate and carrying bag

To order

CA 1860 Thermomètre IR **P01651815**

CA 1862 Thermomètre IR **P01651816**

FRANCE
Chauvin Arnoux
 190, rue Championnet
 75876 PARIS Cedex 18
 Tél. : +33 1 44 85 44 85
 Fax : +33 1 46 27 73 89
 info@chauvin-arnoux.fr
 www.chauvin-arnoux.fr

UNITED KINGDOM
Chauvin Arnoux LTD
 Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk
 Dewsbury, West Yorkshire - WF12 7TH
 Tel: +44 1924 460 494
 Fax: +44 1924 455 328
 info@chauvin-arnoux.co.uk
 www.chauvin-arnoux.com

MIDDLE EAST
CHAUVIN ARNOUX MIDDLE EAST
 P.O. BOX 60-154
 1241 2020 JAL EL DIB - LEBANON
 Tel: +961 1 890 425
 Fax: +961 1 890 424
 camie@chauvin-arnoux.com
 www.chauvin-arnoux.com

**CHAUVIN
 ARNOUX**