

## **Nestor St Closure XS 12F Mech**



## **Features**

- Designed for direct buried, pole and wall mount or manhole applications
- Includes a fixed splice tray
- Capacity for 12 single fiber splices
- One oval inlet with 55,6mm x 40,9mm inner dimensions

Dimensions
Length 273mm, closure Ø 76,1mm, flange Ø 114mm


Material Acid-proof stainless steel

Tightness IP 67


Product name and code
LV2501 Jatkospkt. Nestor St Closure XS 12F Mech


© Nestor Cables Ltd. 2020. 24.06.2020

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the prior written consent of Nestor Cables Ltd. The information is believed to be correct at the time of issue. Nestor Cables Ltd. reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorized by Nestor Cables Ltd.





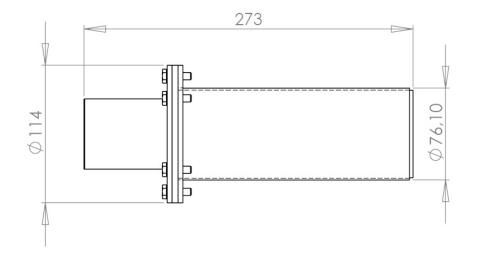





Inner frame of the Nestor St Closure XS 12F Mech.

© Nestor Cables Ltd. 2020. 24.06.2020



## **Basic assembly**

- Grounding clip for 16 mm<sup>2</sup> grounding wire
- Mounting and grounding supplies for incoming cables
- Splice sleeves & sleeve holder for 12 fibers
- Cable ties
- Dehumidifier
- Sandpaper



Nestor St Closure XS 12F Mech basic assembly.

© Nestor Cables Ltd. 2020. 24.06.2020



## **Optional accessories**

LV2543 Nestor Mech Seal 6 x 10mm

LV2544 Nestor Mech Seal 4 x 15mm

LV2545 Nestor Mech Seal 2 x 18mm

• LV2546 Nestor Mech Seal 2 x 23mm

LV2191 Pole and wall mount









