

**PROmax**  
**PRO MAX 960W 24V 40A****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



PROmax offers diverse solutions for demanding automation.

Our high performance and durable PROmax switch-mode power supply units are designed for especially demanding requirements. PROmax reliably copes with continuous overload of up to 20% or short-term peak loads of 300% occurring with high control cabinet temperatures.

High boost capability and full power are also made possible in a wide temperature range. Our switch-mode power supply units can be used around the world and are also suitable for confined spaces thanks to their low width.

Together with our uninterruptible DC USPs, the diode modules or CAP modules, you can create a power supply solution that is tailored to your requirements.

**General ordering data**

Type	PRO MAX 960W 24V 40A
Order No.	<a href="#">1478150000</a>
Version	
GTIN (EAN)	4050118286038
Qty.	1 pc(s).

**PROmax**  
**PRO MAX 960W 24V 40A**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

Width	140 mm	Height	130 mm
Depth	150 mm	Net weight	3,900 g

**Temperatures**

Humidity at operating temperature	5...95 %, no condensation	Operating temperature	-25 °C...70 °C
Storage temperature	-40 °C...85 °C		

**Input**

AC current consumption	4,52A @ 230 VAC / 10A @ 115 VAC	AC input voltage range	85...277 V AC
Connection system [Input]	Screw connection	DC current consumption	2,8A @ 370 VDC / 10A @ 120 VDC
DC input voltage range	80...370 V DC	Frequency range AC	45...65 Hz
Input fuse (internal)	Yes	Inrush current	max. 15 A
Rated input voltage	100...240 V AC (wide-range input)	Recommended back-up fuse	20 A, char. B circuit breaker, 16 A, Char. C circuit breaker

**output**

Connection system [Output]	Screw connection	Continuous output current @ $U_{Rated}$	48 A @ 45°C, 30 A @ 70°C
Output voltage	22.5...29.5 V (adjustable via potentiometer)	Parallel connection option	yes, max. 3
Power boost @ $U_{Rated}$	48 A (1 min), 60 A (4s), 100...240 V AC	Pulsed current capacity @ $U_{Rated}$	120 A (2ms)
Rated (nominal) output current @ $U_{Nom}$	40 A @ 60 °C	Rated output voltage	24 V DC $\pm$ 1 %
Residual ripple, breaking spikes	< 50 mVss @ $U_{Nenn}$ , Full Load		

**General data**

AC failure bridging time @ $I_{Nom}$	min. 20 ms	Current limiting	> 120 % $I_N$
Degree of efficiency	93%	Derating	> 60°C / 75% @ 70°C
Earth leakage current, max.	3.5 mA	Housing version	Metal, corrosion resistant
MTBF	>500.000h (25°C, IEC 61709)	Mounting position, installation notice	Horizontal on TS35 mounting rail, with 50 mm of clearance at top and bottom for air circulation. Can be mounted side by side with no space in between.
Operating temperature	-25 °C...70 °C	Power factor (approx.)	> 0.95 @ 230 V AC
Power loss, idling	5 W	Power loss, nominal load	72.3 W
Protection against reverse voltages from the load	30...35 V DC	Series switching capability	Yes
Start-up	$\geq -40$ °C	Status indication	LED red/green and relay ( $\geq 21.6$ V DC LED green, relay on/ $\leq 20.6$ V DC LED red, relay off)
Surge voltage category	III		

## PROmax PRO MAX 960W 24V 40A

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

## Technical data

### EMC / shock / vibration

Vibration resistance IEC 60068-2-6	2.3 g	Interference immunity test acc. to	EN 55024, EN 55022, IEC61000-3-2,-3, IEC61000-4-2,-3,-4,-5,-6,-8,-11
Shock resistance IEC 60068-2-27	30 g in all directions		

### Insulation coordination

Class of protection	I, with PE connection	Humidity at operating temperature	5...95 %, no condensation
Insulation voltage input / earth	3.5 kV	Insulation voltage output / earth	0.5 kV
Insulation voltage, input/output	4 kV	Pollution severity	2
Surge voltage category	III		

### Electrical safety (applied standards)

Electrical machine equipment	Acc. to EN60204	For use with electronic equipment	Acc. to EN50178 / VDE0160
Protection against dangerous shock currents	Acc. to VDE0106-101	Protective separation / protection against electrical shock	VDE0100-410 / acc. to DIN57100-410
Safety extra-low voltage	SELV acc. to EN60950, PELV acc. to EN60204, IEC61204	Safety transformers for switch-mode power supplies	IEC61558-2-16

### Connection data (input)

Conductor cross-section, AWG/kcmil , max.	10	Conductor cross-section, AWG/kcmil , min.	26
Conductor cross-section, flexible , min.	0.22 mm <sup>2</sup>	Conductor cross-section, rigid , max.	6 mm <sup>2</sup>
Conductor cross-section, rigid , min.	0.18 mm <sup>2</sup>	Connection system [Input]	Screw connection
Number of terminals [Input]	3 for L/N/PE	Screwdriver blade	0.8 x 4.0, PZ 1
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Wire connection cross section, flexible (input), max.	4 mm <sup>2</sup>		

### Connection data (output)

Conductor cross-section, AWG/kcmil , max.	8	Conductor cross-section, AWG/kcmil , min.	22
Conductor cross-section, flexible , max.	16 mm <sup>2</sup>	Conductor cross-section, flexible , min.	0.5 mm <sup>2</sup>
Conductor cross-section, rigid , max.	16 mm <sup>2</sup>	Conductor cross-section, rigid , min.	0.5 mm <sup>2</sup>
Connection system [Output]	Screw connection	Number of terminals [Output]	8 (+, -, 11, 13, 14)
Screwdriver blade	1.0 x 5.5	Tightening torque, max.	1.5 Nm
Tightening torque, min.	1.2 Nm		

### Signalling

Contact load (NO contact)	max. 30 V DC / 1 A	Floating contact	Yes
Status indication	LED red/green and relay (≥21.6 V DC LED green, relay on/ ≤20.6 LED red, relay off)		

**PROmax**  
**PRO MAX 960W 24V 40A****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**Technical data****Approvals**

Institute (cULus)



Certificate no. (cULus)

E258476

Institute (cURus)



Certificate No. (cURus)

E255651

**Classifications**

eClass 6.2

27-04-90-04

**Product information**

Descriptive text ordering data

The internal varistor found in a switch-mode power supply does not replace the need for surge protection within a system.

**Approvals**

Approvals



ROHS

Conform

**Downloads**

Package insert

[Operating instructions](#)

Declaration of Conformity


[K569\\_04\\_14.pdf](#)[3-D model](#)

## PROmax PRO MAX 960W 24V 40A


**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Electric symbol

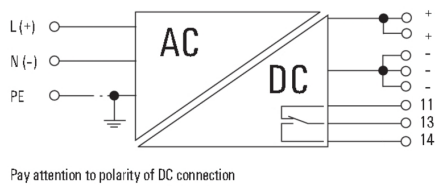

### Derating curve

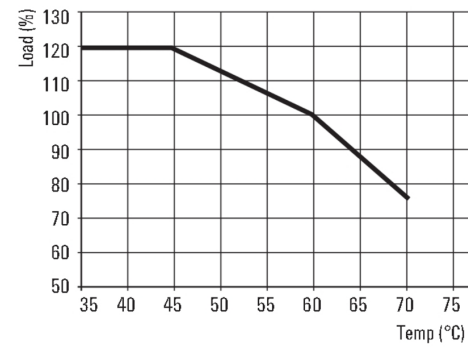

# Adressen weltweit

## Let's connect.

<b>AE</b>	<b>Vereinigte Arabische Emirate</b> Weidmüller Middle East FZE Warehouse Q3-79 SAIF-Zone P.O. BOX 8591 Sharjah Telefonnummer +971 65572723 Faxnummer +971 65572724 wme.info@weidmuller.com	<b>BH</b>	<b>Bahrain</b> Khayber Trading Company P.O Box 1976 Manama Telefonnummer +973 720747 Faxnummer +973 720331 khayber@batelco.com.bh	<b>CO</b>	<b>Kolumbien</b> Automatización Avanzada S. A. Carrera 97 No., 24 c - 23 Bodega 4 110911 Bogotá-D.C. Telefonnummer +57 (1) 547-8510 Faxnummer +57 (1) 422-3044 comercial@automatizacionavanzada.com www.automatizacionavanzada.com	<b>FI</b>	<b>Finnland</b> Weidmüller Suomi, Weidmüller Aktiebolagetin siivliike Koy Plaza Vivace Äyritie 8C FI 1510 Vantaa Telefonnummer +358 20 7351300 Faxnummer +358 800 114 667 asiakaspalvelu@weidmuller.fi www.weidmuller.fi	<b>ID</b>	<b>Indonesien</b> PT. Nego Electrindo Ruko Mega Grosir Cempaka Mas Blok 1 No. 20 - 22 Jakarta 10640 Telefonnummer +62 21 42882255 Faxnummer +62 21 42882266 sales@negoelectrindo.co.id
<b>AO</b>	<b>Angola</b> Bitte kontaktieren Sie Phambili Interface Südafrika	<b>BR</b>	<b>Brasilien</b> Weidmüller Conexel do Brasil Conexões Elétricas Ltda. Av. Presidente Juscelino, 642 - Piraporinha Diadema, São Paulo 09950-370 Telefonnummer +55 (11) 4366-9600 Faxnummer +55 (11) 4362-1677 vendas@weidmuller.com.br www.weidmuller.com.br	<b>CR</b>	<b>Costa Rica</b> S. A. ELVATRON S. A. la Uruca 400 Norte Banco Costa Rica San Jose Costa Rica Telefonnummer +506 2961-060 Faxnummer +506 5200-609 dirk.haase@elvatron.com www.elvatron.com	<b>FR</b>	<b>Frankreich</b> Weidmüller E. U. R. L. 12, Chaussée Jules César BP 263 Osnay 95523 Cergy-Pontoise Cedex Telefonnummer +33 1 34 24 55 00 Faxnummer +33 1 34 24 55 01 mail@weidmuller.fr	<b>IE</b>	<b>Irland</b> Bitte kontaktieren Sie Weidmüller Ltd. Großbritannien
<b>AR</b>	<b>Argentinien</b> CPI SA Bauness 2660 C1431DOF Buenos Aires Telefonnummer +54 11 4523 8008 Faxnummer +54 11 4522 0546 info@cpi.com.ar www.cpi.com.ar	<b>BW</b>	<b>Botswana</b> Bitte kontaktieren Sie Phambili Interface Südafrika	<b>CZ</b>	<b>Tschechische Republik</b> Weidmüller s.r.o. Lomnického 5/1705 140 00 Praha 4 Telefonnummer +420 244 001 400 Faxnummer +420 244 001 499 office@weidmuller.cz www.weidmuller.cz	<b>GB</b>	<b>Großbritannien</b> Weidmüller Ltd. Klippon House Centurion Court Office Park, Meridian East, Meridian Business Park Leicester LE19 1TP Telefonnummer +44 116 282 3470 Faxnummer +44 116 289 3582 marketing@weidmuller.co.uk www.weidmuller.co.uk	<b>IL</b>	<b>Israel</b> A. U. Shay Ltd. 23/25, Embar Street 49222 Petach-Tikva P.O. Box 1 00 49 49222 Petach-Tikva Telefonnummer +972 3-923-3601 Faxnummer +972 3-923-4601 shay@uriel-shay.com www.uriel-shay.com
<b>AT</b>	<b>Österreich</b> Weidmüller GmbH IZ NOE Süd Straße 2b, Obj M 59 2355 Wiener Neudorf Telefonnummer +43 2236 67080 Faxnummer +43 2236 6708-899 office.at@weidmuller.com www.weidmuller.com	<b>BY</b>	<b>Weißrussland</b> TECHNIKON Ltd. Nezavisimosti pr. 177-9 220125 Minsk Telefonnummer +375 17 393-11-77 Faxnummer +375 17 3930080 wm@technikon.by	<b>DE</b>	<b>Deutschland</b> Weidmüller GmbH & Co. KG Ohmstraße 9 32758 Detmold Postfach 30 54 32720 Detmold Telefonnummer +49 5231 1428-0 Faxnummer +49 5231 14-292083 weidmuller@weidmuller.de www.weidmuller.de	<b>GE</b>	<b>Georgien</b> Bitte kontaktieren Sie unser Representative Office Rashad Mahmudov Aserbaidshjan.	<b>IN</b>	<b>Indien</b> Repräsentanz Büro Weidmüller Electronics India Pvt. Ltd. 12th Lane North Avenue, Opp Joggers Park, Kalyani Nagar, Pune 411 006 Telefonnummer +91 20-41290090 wmi.pune@weidmuller.in www.weidmuller.com
<b>AU</b>	<b>Australien</b> Weidmüller Pty. Ltd. PO BOX 6944 Huntingwood 2148 Huntingwood Drive 43 Huntingwood NSW 2148 Telefonnummer +61 2 9671 9999 Faxnummer +61 2 9671 9911 info@weidmuller.com.au www.weidmuller.com.au	<b>CA</b>	<b>Kanada</b> W Interconnections Canada Inc. 10 Spy Court Markham Ontario L3R 5H6 Telefonnummer +1 (905) 475-1507 Ext. 9836 Faxnummer +1 (905) 475-2798 support@weidmuller.ca www.weidmuller.ca	<b>DK</b>	<b>Dänemark</b> Weidmüller Danmark Vallensbækvej 18A 2605 Brøndby Telefonnummer +45 27747800 kundeservice@weidmuller.dk www.weidmuller.dk	<b>GR</b>	<b>Griechenland</b> G.A. Solutions Ippokratous 11 Metamorfosi 144 52 Athen Telefonnummer +30 210 2823233 Faxnummer +30 210 2823233 info@weidmuller.gr www.weidmuller.gr	<b>IS</b>	<b>Island</b> Samey Automation Center Lyngas 13 210 Garabær Telefonnummer +354 510 5200 Faxnummer +354 510 5201 Samey@samey.is www.samey.is
<b>AZ</b>	<b>Aserbaidshjan</b> Repräsentanz Büro Rashad Mahmudov Demirchi Tower, 4th floor 37, Khojali ave. AZ 1025 Baku Telefonnummer +994 12 488 80 36 Faxnummer +994 12 488 80 37 rashad.mahmudov@weidmuller.com	<b>CG</b>	<b>Kongo</b> Bitte kontaktieren Sie Phambili Interface Südafrika	<b>EC</b>	<b>Ecuador</b> Elsystec S. A., Electricidad Sistemas y Tecnología Vasco de Contreras N35-251 y Mañosa Quito - Pichincha Telefonnummer +593 22456510 Faxnummer +593 22456755 Elsystec@uiio.satnet.net	<b>GT</b>	<b>Guatemala</b> Prestelectro, Prestegard Electro, S.A. Avenida Petapa 44-22, Zona 12 Guatemala City Telefonnummer +502 2442-3346 Faxnummer +502 2476-8945 ventas@prestelectro.com	<b>IT</b>	<b>Italien</b> Weidmüller S. r.l. Via Albert Einstein 4 20092 Cinisello Balsamo Milano Telefonnummer +39 02 660681 Faxnummer +39 02 6124945 weidmuller@weidmuller.it www.weidmuller.it
<b>BA</b>	<b>Bosnien und Herzegowina</b> Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien  oder  BIG electric d.o.o Mladena Stojanovića 117A 78000 Banja Luka Telefonnummer +387 51926277 Faxnummer +387 51926277 bigelectric@blic.net www.bigelectric.ba	<b>CH</b>	<b>Schweiz</b> Weidmüller Schweiz AG Rundbuckstraße 2 8212 Neuhausen am Rheinfall SH Telefonnummer +41 52 674 07 07 Faxnummer +41 52 674 07 08 info@weidmuller.ch www.weidmuller.ch	<b>EE</b>	<b>Estland</b> Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Lettland  oder  Soots Interface OÜ Pärnu mnt 142 11317 Tallinn Telefonnummer +372 609 6933 Faxnummer info@sootsinterface.ee www.sootsinterface.ee	<b>HK</b>	<b>Hong Kong</b> Weidmüller (Hong Kong) Limited Co. Ltd. Unit 1617, Metropolis Tower No. 10 Metropolis Drive, Hunghom, Kowloon Telefonnummer +852 3154 8088 Faxnummer +852 31548099 Info-hk@weidmuller.com.hk	<b>JM</b>	<b>Jamaika</b> Bitte kontaktieren Sie W Interconnections Inc. USA
<b>BE</b>	<b>Belgien</b> Weidmüller Benelux B. V. Mechelsesteenweg 519 bus 6 en 7 1930 Nossegem Telefonnummer +32 2 752 40 70 Faxnummer +32 2 751 36 06 info@weidmuller.be www.weidmuller.be	<b>CL</b>	<b>Chile</b> ATS- INTECH Maria Luisa Santander 0475 Santiago Providencia 7500859 Telefonnummer +56 2 341 1271 Faxnummer +56 2 341 1275 felipe@atsintech.com www.atsintech.com  CPI CHILE LTDA Av. Presidente Frei Montalva 6001, 47 complejo el cortijo Santiago - Conchalí Telefonnummer +562 963 8440 Faxnummer +562 963 8440 cpi@cpichile.cl www.cpichile.cl	<b>EG</b>	<b>Ägypten</b> Standard Electric (OMEGA) 87, Mohamed Farid Street Heliopolis Cairo Telefonnummer +202 26229000 Faxnummer +202 26221555 stdelec@rite.com	<b>HR</b>	<b>Kroatien</b> ElektroPARTNER d.o.o. Slavonska avenija 24/6 HR-10000 Zagreb Telefonnummer +385 (1) 6184 793 Faxnummer +385 (1) 6184 795 elektropartner@zg.t-com.hr www.elektropartner.hr	<b>JO</b>	<b>Jordanien</b> Trans Jordan for Electro PO Box 33 06 07 Amman Telefonnummer +962 6 533 2020 Faxnummer +962 6 533 5800 transjordan@batelco.jo
<b>BG</b>	<b>Bulgarien</b> Weid-Bul EOOD Bul. "Kliment Ohridski" 13 1756 Sofia Telefonnummer +359 2 963 2560 Faxnummer +359 2 963 1098 sofia@weidbul.com www.weidbul.com	<b>CN</b>	<b>China</b> Weidmüller Interface (Shanghai) Co. Ltd. 100 Yutong Road 25 F. BM Intercontinental Business Center 200070 Shanghai Telefonnummer +86 21-22195008 Faxnummer +86 512-68417505 customer.hotline@weidmuller.com.cn www.cnweidmuller.com	<b>ES</b>	<b>Spanien</b> Weidmüller, S. A. Narcis Monturiol 11-13, Pol. Ind. Sudoste 8960 Sant Just Desvern - Barcelona Telefonnummer +34 934 803 386 Faxnummer +34 933 718 055 weidmuller@weidmuller.es www.weidmuller.es	<b>HU</b>	<b>Ungarn</b> Weidmüller Kereskedelmi Kft. Budapest Gibacsi út 6. 1097 Telefonnummer +36 1 382 7700 Faxnummer +36 1 382 7701 info@weidmuller.hu www.weidmuller.hu	<b>JP</b>	<b>Japan</b> Nihon Weidmüller Co. Ltd. Sphere Tower Tennoz 2-2-8 Higashi-Shinagawa, Shinagawa-ku Tokyo 140-0002 Telefonnummer +81 3 6711 5300 Faxnummer +81 3 6711 5333 weidmullerjapan@weidmuller.co.jp www.weidmuller.co.jp



Let's connect.

Alle Weidmüller Adressen sowie Ihren lokalen Ansprechpartner finden Sie im Internet unter: [www.weidmueller.com/countries](http://www.weidmueller.com/countries)

Vertriebsgesellschaft

Auslandsvertretung

ohne Auslandsvertretung

<b>KE</b> <b>Kenia</b> Bitte kontaktieren Sie Phambili Interface Südafrika	<b>MG</b> <b>Madagaskar</b> Bitte kontaktieren Sie Phambili Interface Südafrika	<b>NO</b> <b>Norwegen</b> Sivilingenier J.F. Knudtzen AS Billingstadsletta 97 1396 Billingstad PO Box 160 1378 Nesbru Telefonnummer +47 66 98 33 50 Faxnummer +47 66 98 09 55 firmapost@jfkudtzen.no www.jfkudtzen.no	<b>PT</b> <b>Portugal</b> Weidmüller Sistemas de Interface S. A. Estrada Outeiro Polima, R. Augusto Dias da Silva, Lote B - Esct. 2 São Domingos de Rana 2785-515 Abóboda Telefonnummer +351 214 459 191 Faxnummer +351 214 455 871 weidmuller@weidmuller.pt www.weidmuller.pt	<b>SE</b> <b>Schweden</b> Weidmüller AB Axel Danielssons väg 271 BOX 31025 SE-200 49 Malmö Telefonnummer +46 77-143 00 44 Faxnummer +46 40-37 48 60 info@weidmuller.se www.weidmuller.se
<b>KR</b> <b>Korea</b> Weidmüller Korea Co. Ltd. 9th floor, Wonbang B/D Samseong 2-Dong, Gangnam- Gu Seoul 143-42 Telefonnummer +82 2-516- 0003 Faxnummer +82 2-516-0090 info@weidmuller.co.kr www.weidmuller.co.kr	<b>MK</b> <b>Mazedonien</b> Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien  oder  ELEKTRO - SMK dool UL. III Makedonska brigada b.b. 1000 Skopje Telefonnummer +389 22460295 Faxnummer Elektro-smk@telekabel.net.mk	<b>NZ</b> <b>Neuseeland</b> Cuthbert S. Steward Ltd. 27 Te Puni Street Petone PO Box 38496 Wellington Mail Centre 5054 Telefonnummer (04) 568 6156 Faxnummer (09) 489 1752 csl@cuthbertsteward.co.nz  Cuthbert S. Steward Ltd 4 Fred Thomas Drive Aon Building, Ground Floor, South Entry Takapuna PO Box 100 338 North Shore City 745 Telefonnummer (09) 489 1751 Faxnummer (04) 568 6056 cslak@cuthbertsteward.co.nz	<b>PY</b> <b>Paraguay</b> Bitte kontaktieren Sie CPI SA Argentinien	<b>SG</b> <b>Singapur</b> Weidmüller Pte. Ltd. 70 Bendemeer Road # 04-03 Luzerne Building Singapore 339940 Telefonnummer +65 6841 5311 Faxnummer +65 6841 5377 info@weidmuller.com.sg www.weidmuller.com.sg
<b>KW</b> <b>Kuwait</b> Kana Controls General Trading & Contracting Co. W. L. L. Al Rai Industrial Area, Plot 28-30, St. 31 13016 Safat B.P. 25593 Telefonnummer +965 4741373 Faxnummer +965 4741537 info@kanacontrols.com	<b>MT</b> <b>Malta</b> E. S. S., Electrical Supplies & Services Ltd. San Gwakkin Road Mrieħel  Telefonnummer +356 21255777 Faxnummer +356 21255999 robert.agius@ess.com.mt	<b>OM</b> <b>Oman</b> DAN INTERNATIONAL LLC. Ghala St. 111 BP 2901 Seeb Telefonnummer +968 5036 77 Faxnummer +968 5037 55 yedu@danintl.com	<b>QA</b> <b>Katar</b> Petroleum Technology Co. W.L.L. PO Box 16069 5th Floor Toyota tower Telefonnummer +974 444 19603 Faxnummer +974 444 19604 petrotec@qatar.net.qa www.petrotec.com.qa	<b>SI</b> <b>Slowenien</b> Elektrospoji d. o. o. Stegne 27 SI- 1000 Ljubljana Osrednjeslovenska Telefonnummer +386 1 511 3810 Faxnummer +386 1 511 1604 info@elektrospoji.si www.elektrospoji.si
<b>KZ</b> <b>Kasachstan</b> Bitte kontaktieren Sie OOO Weidmüller Russland	<b>MU</b> <b>Mauritius</b> Mubelo Electrical Ltd. Office 26, Gateway building, St Jean Road Quatre Bornes Mauritius Telefonnummer +230 4670989 Faxnummer +230 4654051 richard.mubelo@orange.mu	<b>PE</b> <b>Peru</b> IMPEXINCA S.A.C. Calle Ortiz de Zevallos No. 105, Urb. San Antonio 18 Lima, Miraflores Telefonnummer +51 1 447 5608 info@impexinca.pe www.impexinca.pe  J & W CIA. S. A. Calle 6 Mz. D Lte. 23, Urb. Ind. Grimanesa 01 Callao Telefonnummer +51 1 572 2539 Faxnummer +51 1 572 0152 contacto@jwcia.com www.jwcia.com	<b>RO</b> <b>Rumänien</b> Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Ionescu Crum Street, No. 1, 1st Tower, 1st Floor, Office 4 500446 Brasov - Brasov Business Park Telefonnummer +40 (268) 446 222 Faxnummer +40 (262) 205 410 claudiu.totea@weidmueller. com www.weidmueller.com	<b>SK</b> <b>Slowakei</b> ELEKTRIS s.r.o. Elektrárenská 1 831 04 Bratislava Telefonnummer +421 2/4920 0113 Faxnummer +421 2/4920 0119 bratislava@elektris.sk
<b>LB</b> <b>Libanon</b> Progress Engineering & Trading Enterprises Al Nahr Street Beirut 11-1111 Telefonnummer +961 1 444 664 Faxnummer +961 1 561 880 progress@inco.com.lb	<b>MW</b> <b>Malawi</b> Bitte kontaktieren Sie Phambili Interface Südafrika	<b>PH</b> <b>Philippinen</b> Enclosure Systems Specialists Inc. 2276 Don Chino Roces Avenue Extension Room 103/105 Narra Building 1231 Makati City Telefonnummer +63 2 813 8580 Faxnummer +63 2 813 8596 sales_encsys@pltdsl.net www.enclosuresystemsph. com	<b>RS</b> <b>Serbien</b> Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Ustanička 189, III sprat Iokal 7a 11050 Beograd Telefonnummer +381 112885274 Faxnummer +381 112885274 zoran.rabrenovic@ weidmueller.com  TeLa Elektrik d.o.o. Ul. Dr. Drage Ljočić 6 Beograd Telefonnummer +381 11 2772 415 Faxnummer +381 11 2772 850 office@tela.rs www.tela.rs	<b>SV</b> <b>El Salvador</b> Prestegard Electro 11 Avenida Norte No. 240 Edificio Salazar No. 2 San Salvador Telefonnummer +503 2271 1690 Faxnummer +503 2221 3851 prestegard@navegante.com.sv
<b>LT</b> <b>Litauen</b> Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Lettland  oder  ELEKTROS IRANGA Tinklų g. 29 a LT-5319 Panevezys Telefonnummer +370 (45) 582 828 Faxnummer info@eliranga.lt	<b>MX</b> <b>Mexiko</b> W Interconnections S. A. DE C. V. Blvd. Hermanos Serdán 698, Col. San Rafael Oriente 72029 Puebla Telefonnummer +52 (222) 268 6227 Faxnummer +52 (222) 286 6242 clientes@weidmuller.com.mx	<b>PK</b> <b>Pakistan</b> Automation Controls (Pak) Apartment No. 33 C III, Chenab Block, Allama Iqbal Town Lahore Telefonnummer +92 42 37809948 Faxnummer +92 42 37809950 nadeem@acpakistan.com.pk www.acpakistan.com.pk	<b>RU</b> <b>Russland</b> OOO Weidmüller Warschavskoye highway, 25 A, bld. 6 Moskau 117105 Telefonnummer +7 (495) 771-69-40 Faxnummer +7 (495) 771- 69-41 Info@weidmueller.ru www.weidmueller.ru	<b>SY</b> <b>Syrien</b> Bitte kontaktieren Sie Weidmüller Middle East FZE Vereinigte Arabische Emirate
<b>LU</b> <b>Luxemburg</b> Bitte kontaktieren Sie Weidmüller Benelux B. V. Niederlande	<b>MY</b> <b>Malaysia</b> Connect Plus Technology Sdn Bhd No. 43, Jalan PJS 11/22, Bandar Sunway 46150 Petaling Jaya Selangor Darul Ehsan Telefonnummer +60 3 5633 7363 Faxnummer +60 3 5633 6562 paul@cptech.com.my www.cptech.com.my	<b>PL</b> <b>Polen</b> Weidmüller Sp. z o. o. ul. Ogrodowa 58 00-876 Warszawa Telefonnummer +48 22 510 09 40 Faxnummer +48 22 510 09 41 biuro@weidmuller.com.pl www.weidmuller.pl	<b>SA</b> <b>Saudi-Arabien</b> Al Abdulkarim Holding Co. P.O. Box 4 Dammam 31411 Telefonnummer +966 3 8337110 Faxnummer +966 3 8829547 E-Mail salehsk@akh.com.sa www.weidmueller.ae  Saudi Electric Supply Company (SESCO) P.O. Box 32 98 Al Khobar 31952 Telefonnummer +966 3 8829546 Ext. 3030 Faxnummer E-Mail Safdar.Malik@sesco- gex.com www.sesco-gex.com	<b>SZ</b> <b>Swasiland</b> Bitte kontaktieren Sie Phambili Interface Südafrika
<b>LV</b> <b>Lettland</b> SIA Abi4 Daugavgrivas 31b Riga, LV-1007 Telefonnummer +371 674 70999 Faxnummer +371 676 24562 abi_4@tvnet.lv  Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Udens str. 12-118 Riga, LV-1007 Telefonnummer +371 29254766 Faxnummer +371 674 65637 lgonis.rudaks@weidmueller. com www.weidmueller.com	<b>MZ</b> <b>Mosambik</b> Bitte kontaktieren Sie Phambili Interface Südafrika	<b>PR</b> <b>Puerto Rico</b> Bitte kontaktieren Sie W Interconnections Inc. USA	<b>TH</b> <b>Thailand</b> Pisanu Engineering Co. Ltd. Kwang Dingaeng, Khet Dingdaeng 800/2 Soi Trakulsuk, Asoke- dindaeng Road Dingdaeng, Bangkok 10400 Telefonnummer +66 2 248 2896 Faxnummer +662 105 6301 ecsales@pisanu.co.th www.pisanu.co.th  Repräsentanz Büro Weidmüller Pte. Ltd. 37/F, Sathorn Square Building 98 North Sathorn Road Bangkok, Silom Bangrak 10500 Telefonnummer +66 2 105 6300 Faxnummer +66 2 642 9220 info@weidmuller.com.sg	<b>SV</b> <b>El Salvador</b> Prestegard Electro 11 Avenida Norte No. 240 Edificio Salazar No. 2 San Salvador Telefonnummer +503 2271 1690 Faxnummer +503 2221 3851 prestegard@navegante.com.sv
<b>MD</b> <b>Moldawien</b> BERHORD A & D srl 79/1, str. Milescu Spartaru MD-2075 Chisinau Moldova Telefonnummer +373 (22) 815002 Faxnummer +373 (22) 815007 atiuleanu@berhord.com www.ad.berhord.com	<b>NA</b> <b>Namibia</b> Bitte kontaktieren Sie Phambili Interface Südafrika	<b>TR</b> <b>Türkei</b> Weidmüller Elektronik Ticaret Ltd. Sirketi Kavacak Mah. Orhan Veli Kanik Caddesi 9/1 34810 Beykoz / Istanbul Telefonnummer +90 (216) 537 10 70 Faxnummer +90 (216) 537 10 77 info@weidmuller.com.tr www.weidmuller.com.tr	<b>RU</b> <b>Russland</b> OOO Weidmüller Warschavskoye highway, 25 A, bld. 6 Moskau 117105 Telefonnummer +7 (495) 771-69-40 Faxnummer +7 (495) 771- 69-41 Info@weidmueller.ru www.weidmueller.ru	<b>SE</b> <b>Schweden</b> Weidmüller AB Axel Danielssons väg 271 BOX 31025 SE-200 49 Malmö Telefonnummer +46 77-143 00 44 Faxnummer +46 40-37 48 60 info@weidmuller.se www.weidmuller.se
<b>ME</b> <b>Montenegro</b> Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien.	<b>NG</b> <b>Nigeria</b> Bitte kontaktieren Sie	<b>NL</b> <b>Niederlande</b> Weidmüller Benelux B. V. Franciscusweg 221 1216 SE Hilversum Postfach 1505 1200 BM Hilversum Telefonnummer +31 35 626 12 61 Faxnummer +31 35 623 20 44 info@weidmuller.nl www.weidmuller.nl	<b>PT</b> <b>Portugal</b> Weidmüller Sistemas de Interface S. A. Estrada Outeiro Polima, R. Augusto Dias da Silva, Lote B - Esct. 2 São Domingos de Rana 2785-515 Abóboda Telefonnummer +351 214 459 191 Faxnummer +351 214 455 871 weidmuller@weidmuller.pt www.weidmuller.pt	<b>SG</b> <b>Singapur</b> Weidmüller Pte. Ltd. 70 Bendemeer Road # 04-03 Luzerne Building Singapore 339940 Telefonnummer +65 6841 5311 Faxnummer +65 6841 5377 info@weidmuller.com.sg www.weidmuller.com.sg

# Adressen weltweit

## Let's connect.

**TW****Taiwan**

Weidmüller (Hong Kong)  
Limited  
No. 3, Lane 89, ChaungYang  
N. Rd.  
24148 SanChuang City,  
Taipei  
Telefonnummer +886 921  
949 751  
roy.lin@weidmueller.com.hk

**TZ****Tansania**

Bitte kontaktieren Sie  
Phambili Interface  
Südafrika

**UA****Ukraine**

LLC WM UKRAINE  
Levanevskogo str. 6  
Kiev  
3058  
Telefonnummer +38 044  
490 32 48  
Faxnummer  
info@wm-ua.com.ua  
wm-ua.com.ua/  
  
Repräsentanz Büro  
Weidmüller Interface GmbH  
& Co. KG  
Z, office 303  
7-D, Zdolbunivska str.  
Kiev, 2081  
Telefonnummer (Mobil) +38  
050 440 25 24  
info.ua@weidmueller.com

**US****USA**

W Interconnections Inc.  
821 Southlake Boulevard  
Richmond Virginia 23236  
Telefonnummer +1 (804)  
794-2877  
Faxnummer +1 (804) 379-  
2593  
info@weidmuller.com  
www.weidmuller.com

**UY****Uruguay**

REWO Uruguay S. A.  
AV. Bolivia 2001 Esq  
Rocafuerte  
11300 Carrasco Montevideo  
Telefonnummer +598 2604  
8439  
Faxnummer +598 2604  
8439  
rewo@rewouruguay.com.uy

**UZ****Usbekistan**

Bitte kontaktieren Sie  
OOO Weidmüller  
Russland

**VE****Venezuela**

Somerinca C. A.  
Corazon de Jesus - 3ra  
Transversal con calle el  
Carmen- Los Dos Caminos  
Caracas 1070-A  
Telefonnummer +58  
2122352748  
Faxnummer +58  
2122399341  
klocmoeller@cantv.net  
www.somerinca.com

**VN****Vietnam**

AUMI Industrial Equipment &  
Automation Company Limited  
E1, La Thanh Hotel  
218 Doi Can Street  
Lieu Giai Ward, Ba Dinh  
District  
Hanoi City  
Telefonnummer +84 4  
37628601  
Faxnummer +84 4  
62661391  
aumi@aumi.com.vn  
www.aumi.com.vn  
  
Repräsentanz Büro  
Weidmüller Pte. Ltd.  
Level 16 Saigon Tower  
Building  
29 Le Duan Street  
District 1  
Ho Chi Minh  
Telefonnummer +848 3520  
7717  
Faxnummer +848 3520  
7604  
info@weidmuller.com.sg

**ZA****Südafrika**

Phambili Interface  
PO Box 193  
1609 Johannesburg, Edenvale  
5 Bundo Road, Sebenza  
1610 Johannesburg  
Telefonnummer +27 (11)  
4521930  
Faxnummer  
info@weidmuller.co.za  
www.weidmuller.co.za

**ZM****Sambia**

Bitte kontaktieren Sie  
Phambili Interface  
Südafrika

**ZW****Simbabwe**

Bitte kontaktieren Sie  
Phambili Interface  
Südafrika