


ESSKV-4 20 EMV-Z

EMC-cable gland, stainless steel A4, M20



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

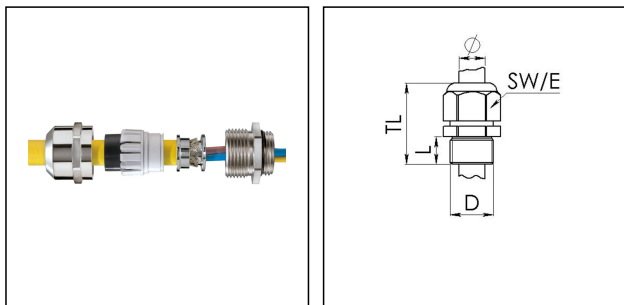

| | |
|--------------------------------|-----------------------------|
| Material cable gland | Stainless steel A4 (1.4404) |
| Material sealing gasket | EPDM |
| Material clamping cage | Polyamide |
| Material earthing insert | Brass chromium-plated |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Protection class | IP68 (5 bar 30 min), IP69 |
| Thread type | M |
| Ø Connection thread D | 20 |
| Lead | 1,5 |
| Length screw-in thread L | 6 mm |
| Ø cable diameter min | 6 mm |
| Ø cable diameter max | 13 mm |
| Ø cable UL certificate | 7,5 mm - 11,3 mm |
| Ø cable below cable shield max | 9,5 mm |
| Key width SW | 24 mm |
| Collar diameter (E) | 27 mm |
| Total length TL | 29 mm - 37 mm |
| Type of cable anchorage | A |
| Install. torques cap nut | 8 N m |
| Install. torques fitting | 8 N m |
| Impact category | 6 |
| WISKA-Order no. | 10069118 |
| Type | ESSKV-4 20 EMV-Z |
| Packing unit | 10 |

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

ETIM-Classification

EC000441

Recommended accessories



| | |
|----------------|----------|
| RDE 20 | 10062185 |
| BS 13 | 10064010 |
| ESMU 20 | 10064190 |

04.08.2021

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice